

To Be Explicit

Martin Fowler

Software is an odd medium in which to construct something. Because few physical forces make you design one way or another, many design decisions sadly resist any form of objective analysis. Where design counts is often not in how the software runs but in how easy it is to change. When how it runs is important, ease of change can be the biggest factor in ensuring good performance.



This drive toward changeability is why it's so important for a design to clearly show what the program does—and how it does it. After all, it's hard to change something when you can't see what it does. An interesting corollary of this is that people often use specific designs because they are easy to change, but when they make the program difficult to understand, the effect is the reverse of what was intended.

Attributes and dictionaries

Let's say we want a person data structure. We can accomplish this by having specific fields, as Figure 1 shows. Of course, to make this work, we must define the variables in the person class. Like many modern languages, Ruby provides a dictionary data structure (also known as a *map*, *associative array*, or *hash table*). We could use Ruby instead to define the person class, using the approach in Figure 2. (This is slower, but let's assume this section of code isn't performance critical.)

Using a dictionary is appealing because it lets you change what you store in the person without changing the person class. If you want to add a telephone number, you can do it without altering the original code.

Despite this, the dictionary doesn't make it easier to modify the code. If I'm trying to use the person structure, I can't tell what is in it. To learn that someone's storing the number of dependents, I must review the entire system. If the number of dependents is declared in the

```
class Person
  attr_accessor :lastName, :firstName, :numberOfDependents
end

def frag1
  martin = Person.new
  martin.firstName = "Martin"
  martin.lastName = "Fowler"
  martin.numberOfDependents = 1
  print (martin.firstName, " ", martin.lastName, " has ",
        martin.numberOfDependents, " dependents")
end
```

Figure 1. Explicit fields (using Ruby).

Figure 2. Dictionary fields (using Ruby).

class, then I only have to look in the person class to see what it supports.

The key principle is that explicit code is easier to understand—which makes the code easier to modify. As Kent Beck puts it, the explicit code is intention revealing.

This dictionary example is small in scale, but the principle holds at almost every scale of software design.

Events and explicit calls

Here's another example, on a slightly bigger scale. Many platforms support the notion of events to communicate between modules. Say we have a reservation module that, when canceled, needs to get a person module to send email to that person.

We can do this using an event, as Figure 3 shows. We can define interesting

```
class Person
  attr_accessor :data
  def initialize()
    @data = {}
  end
end

def frag2
  martin = Person.new
  martin.data["firstName"] = "Martin"
  martin.data["lastName"] = "Fowler"
  martin.data["numberOfDependents"] = 1

  print (martin.data["firstName"], " ",
         martin.data["lastName"], " has ",
         martin.data["numberOfDependents"],
         " dependents")
end
```

events that affect a reservation, and any object that wants to do anything when an event occurs can build a handler to react when it occurs. This approach is appealing because you need not modify

the reservation class to get something else to happen when you cancel a reservation. As long as other objects put handlers on the event, it's easy to extend the behavior at these points.

```
public delegate void ReservationHandler (IReservation source);
public class Reservation ...
  public String Id;
  public event ReservationHandler Cancelled;
  public Person client {
    get {
      return client;
    }
    set {
      value.AddReservation(this);
    }
  }
  public void Cancel(){
    Cancelled (this);
  }

public class Person ...
  public String EmailAddress;
  public readonly ArrayList reservations;

  public void SendCancellationMessage(Reservation arg) {
    // send a message
  }

  public void AddReservation(Reservation arg) {
    //invoke SendCancellationMessage when the cancelled event occurs on arg
    arg.Cancelled +=
      new ReservationHandler(SendCancellationMessage);
  }
```

Figure 3. Cancellation using events (using C#).

However, there is a cost to using events—I can't see what happens at cancellation by reading the code in the cancellation method. To find out what happens, I have to search for all the code that has a handler for the event. The explicit code for this (see Figure 4) clearly shows in the cancel method the consequences of cancellation, at the cost of modifying the reservation class when I need to change the behavior.

I've seen a few code examples that use events heavily, and the problem is

that it's hard to determine what the program does when you call a method. This becomes particularly awkward when you're debugging, because behavior pops up suddenly in places you don't expect.

I'm not saying that you shouldn't use events. They let you carry out behavior without changing a class, which makes them useful when working with library classes you can't modify. They are also valuable because they don't create a depen-

dency from the class triggering the event to the one that needs to react. This lack of a dependency is valuable when the two classes are in different packages and you don't want to add a dependency. The class case of this is when you want to modify a window in a presentation when some domain object changes. Events let you do this while preserving the vital separation of the presentation and domain.

Those forces both suggest events, but in their absence, the lack of explicitness of events becomes more dominant. So, I would be reluctant to use events between two application classes that can be aware of each other.


As you can see, explicitness is not always the dominant force in design decisions. In this example, packaging and dependency forces are also important. People often underestimate the value of explicitness. There are times when I would add a dependency to make code more explicit, but, as always with design, each situation has its own trade-offs to consider.

Data-driven code and explicit subclasses

My final example is on yet a bigger scale. Consider a discounting scheme for orders that uses different discounting plans. The blue plan gives you a fixed discount of 150 if you buy goods from a particular group of suppliers and the value of your order is over a certain threshold. The red plan gives you a 10 percent discount when delivering to certain US states.

Figure 5 presents explicit code for this. The order has a discounter with specific subclasses for the blue and red cases. The data-driven version in Figure 6 uses a generic discounter that is set up with data when the order is created.

The generic discounter's advantage is that you can create new kinds of discounters without making new classes by writing code—if the new classes fit in with the generic behavior. For the sake of argument, let's assume they can. Is the generic case always the best choice? No, again because of explicitness. The explicit subclasses are easier to read and they make it easier to

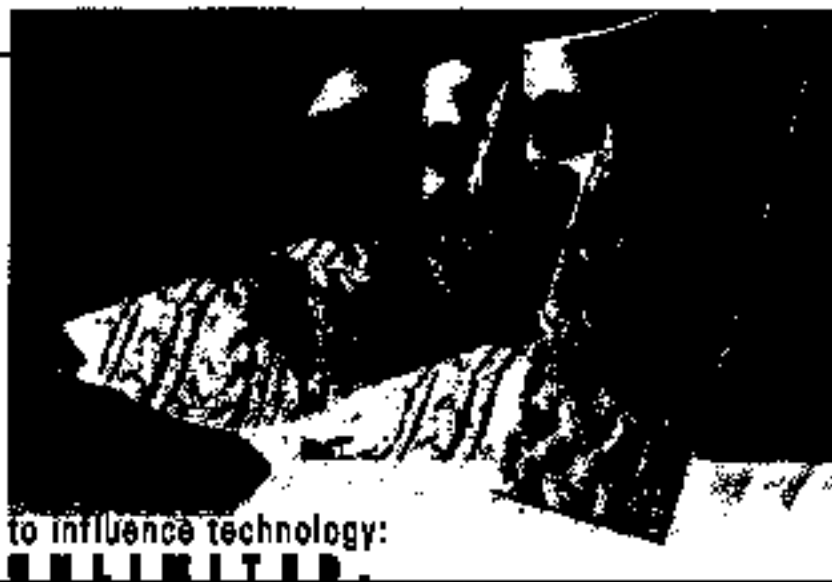

to influence technology:
UNLIMITED.

You really do have the power to affect the way tomorrow's technology advances. You just need to find a company with the opportunities necessary to make the greatest impact. Eaton Corporation is building a new business in the emerging field of hybrid electric powertrains for commercial trucks.

HYBRID ELECTRIC TRUCK TECHNOLOGY

By combining our core strengths in product development, manufacturing, distribution and product support, we are on-track to becoming a major player in the emerging hybrid powertrain market. All we need is your engineering and product development experience to help make it happen.

We are actively seeking industry-leading talent to help us succeed in this fast-paced, technically challenging arena. Automotive engineers who thrive in a highly collaborative, complex system integration environment should find this opportunity very attractive. Perhaps you should consider joining our growing hybrid electric powertrain team and providing a key leadership role in developing the next generation of commercial truck drivetrain technology and products. Why not contact us today to discuss your professional interests and qualifications?

We are currently seeking highly-qualified candidates for the following positions:

- Principal Engineer – Power Electronics 886HE/TRC
- Principal Engineer – Powertrain Controls 887HE/TRC
- Principal Engineer – Modeling and Simulation 888HE/TRC
- Business Development – Product Planning 889HE/TRC

Eaton Corporation is an equal opportunity employer M/F/D/V, providing a competitive salary and comprehensive benefits package. To expedite this process please apply on line via our web site at www.eatonjobs.com or send your resume to one of the following addresses referencing the appropriate job code.

Email: emc@threepointone.com

Address:
Eaton Corporation
P.O. Box 642248, Suite 186
Waltham, MA 02454-0248

EAT•N

ONE COMPANY. ZERO LIMITS.

Figure 4. An explicit reaction to cancel (using C#).

```
public class Reservation ...  
  
    public String Id;  
    public Person client;  
  
    public void Cancel(){  
        client.SendCancellationMessage(this);  
    }  
}
```

Figure 5. Explicitly programmed discount logic (using C#).

```
public class Order ...  
    public Decimal BaseAmount;  
    public String Supplier;  
    public String DeliveryState;  
    public Discounter Discounter;  
  
    public virtual Decimal Discount {  
        get {  
            return Discounter.Value(this);  
        }  
    }  
}  
  
abstract public class Discounter {  
    abstract public Decimal Value (Order order);  
}  
  
public class BlueDiscounter : Discounter {  
    public readonly IList DiscountedSuppliers = new ArrayList();  
    public Decimal Threshold = 500m;  
    public void AddDiscountedSupplier(String arg) {  
        DiscountedSuppliers.Add(arg);  
    }  
    public override Decimal Value (Order order) {  
        return (DiscountApplies(order)) ? 150 : 0;  
    }  
    private Boolean DiscountApplies(Order order) {  
        return DiscountedSuppliers.Contains(order.Supplier) &&  
            (order.BaseAmount > Threshold);  
    }  
}  
  
public class RedDiscounter : Discounter {  
    public readonly IList DiscountedStates = new ArrayList();  
    public void AddDiscountedState (String arg) {  
        DiscountedStates.Add(arg);  
    }  
    public override Decimal Value (Order order) {  
        return (DiscountedStates.Contains(order.DeliveryState)) ?  
            order.BaseAmount * 0.1m : 0;  
    }  
}  
  
// to set up a blue order  
BlueDiscounter bluePlan = new BlueDiscounter();  
bluePlan.AddDiscountedSupplier("ieee");  
  
blue = new Order();  
blue.Discounter = bluePlan;  
blue.BaseAmount = 500;  
blue.Supplier = "ieee";
```

```

public class GenericOrder : Order ...
    public Discounter Discounter;
    public override Decimal Discount {
        get {
            return Discounter.Value(this);
        }
    }

public enum DiscountType {constant, proportional};

public class Discounter ...
    public DiscountType Type;
    public IList DiscountedValues;
    public String PropertyNameForInclude;
    public String PropertyNameForCompare;
    public Decimal CompareThreshold;
    public Decimal Amount;

    public Decimal Value(GenericOrder order) {
        if (ShouldApplyDiscount(order)) {
            if (Type == DiscountType.constant)
                return Amount;
            if (Type == DiscountType.proportional)
                return Amount * order.BaseAmount;
            throw new Exception ("Unreachable Code reached");
        } else return 0;
    }

    private Boolean ShouldApplyDiscount(Order order) {
        return PassesContainTest(order) &&
            PassesCompareTest(order);
    }

    private Boolean PassesContainTest(Order order) {
        return DiscountedValues.Contains
            (GetPropertyValue(order, PropertyNameForInclude));
    }

    private Boolean PassesCompareTest(Order order){
        if (PropertyNameForCompare == null) return true;
        else {
            Decimal compareValue =
                (Decimal) GetPropertyValue(order, PropertyNameForCom-
pare);

            return compareValue > CompareThreshold;
        }
    }

    private Object GetPropertyValue (Order order, String propertyName) {
        FieldInfo fi = typeof(Order).GetField(propertyName);
        if (fi == null)
            throw new Exception("unable to find field for " + property-
Name);

        return fi.GetValue(order);
    }
}

```

Figure 6. Data-programmed discount logic (using C#).

```
//to set up a blue order
GenericDiscounter blueDiscounter = new GenericDiscounter();
String[] suppliers = {"ieee"};
blueDiscounter.DiscountedValues = suppliers;
blueDiscounter.PropertyNameForInclude = "Supplier";
blueDiscounter.Amount = 150;
blueDiscounter.PropertyNameForCompare = "BaseAmount";
blueDiscounter.CompareThreshold = 500m;
blueDiscounter.Type = DiscountType.constant;

blue = new Order();
blue.BaseAmount = 500;
blue.Discounter = blueDiscounter;
```

understand the behavior. With the generic case, you must look at the generic code and setup code, and it's harder to see what's happening—and even harder for more complicated bits of behavior. Of course, we can extend the generic order without “programming,” but I'd argue that configuring that data is a form of programming. Debugging and testing are often both difficult and overlooked with data-driven behavior.

The generic case works when you have dozens of discounters. In such cases, the volume of code becomes a problem, while greater volumes of data are less problematic. Sometimes a well-chosen data-driven abstraction can make the logic collapse into a much smaller and easier-to-maintain piece of code.

Ease of deploying new code is also a factor. If you can easily add new subclasses to an existing system, explicit behavior works well. However, generic behavior is a necessity if new code means long and awkward compile and link cycles.

There's also the option of combining the two, using a data-driven generic design for most of the cases and explicit subclasses for a few hard cases. I like this approach because it keeps the generic design much simpler, but the subclasses give you a lot of flexibility when you need it.

Explicitness is not an absolute in design, but clever designs often become hard to use because they aren't explicit enough. In some cases, the cost is worth it, but it's always something to consider. In the last few years, I've tended to choose explicit designs more often because my views of

what makes good design have evolved (hopefully in the right direction). 

Martin Fowler is the chief scientist for ThoughtWorks, an Internet systems delivery and consulting company. Contact him at fowler@acm.org.

Boston University



If you have significant academic or industrial experience in developing large software systems and you are committed to improving the practice of software engineering, we want to talk to you about a faculty appointment at Boston University in Computer Systems Engineering. Our graduate program teaches the engineering skills necessary for the effective development of large-scale computer systems in which software provides essential functionality. We teach students to apply engineering principles to the design of a full range of computer products from embedded systems, to data communication networks, to software products. Three types of appointments are available in the Department of Electrical and Computer Engineering (ECE) starting in September 2002:

- Research oriented tenure-track and tenured appointments.
- Non-tenure track positions, which require extensive experience in practicing software engineering.
- Adjunct (part-time) positions for Boston-area experts who are interested in teaching their specialty at the graduate level.

All positions require a commitment to excellence in teaching at the undergraduate and graduate levels. For additional information on the College of Engineering and ECE Department visit the College's homepage at <http://www.bu.edu/eng/>.

To learn more about opportunities for a non-tenure track OR adjunct positions, please e-mail: besaleh@bu.edu and a faculty member will call to discuss our opportunities. For tenure-track OR tenured appointments, send your Curriculum Vita to: Professor Bahaa E. A. Saleh, Chair, Department of Electrical and Computer Engineering, Boston University, 8 Saint Mary's Street, Boston, MA 02215.